


Wood Filler

- Water based
- Easy to use
- Quick drying
- Low odour
- Stainable and flexible
- Suitable for interior and exterior use
- Wide range of colours available

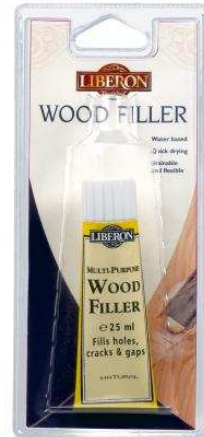

USAGE

Interior & exterior

COVERAGE

As required

APPLICATION

Painter's knife

DRYING TIME

Up to 2 hours

TOOL CLEANING

Water

Product use

Liberon Wood Filler is ready to use, water based, multi-purpose filler for filling and repairing surface damage in wood. Quick drying, shrink and crack resistant, it is easily sanded and may be screwed and nailed. The low odour, easy to use Wood Filler is suitable for both interior and exterior use and may be stained, varnished, waxed or painted. When using outdoors protect with a suitable exterior grade finish. Wood Filler is available in natural and a selection of wood shades, it may also be coloured with Liberon Earth Pigments.

Preparation

Ensure the area to be repaired is clean, dry and free from dust. Select the colour which is closest to the colour of the wood, adapting your choice if dyeing the wood.

Application

Apply using a Liberon plastic scraper or suitable filling knife. For best results resist overspreading the repair area, but leave sufficient overfill to enable thorough sanding. Allow to dry thoroughly – for up to two hours depending on the depth of the repair. Then sand, colour and finish as required. Small holes may be filled in one operation. Deeper holes should be built up in layers.

Important: always test products on spare surface or inconspicuous area for colour, compatibility and end results. Wood Filler may accept dyes/stains differently to the surrounding wood.

Packaging

Wood Filler is available in 25 ml BP

Colours

Neutral, Antique Pine, Mahogany, Dark Oak.

Health and Safety

Keep out of the reach of children. Do not empty into drains. Use only in well-ventilated areas. Do not allow to freeze.

This product should be used in accordance with the manufacturer's instructions. Recommendations are for guidance only since conditions of use are completely beyond our control. For technical or practical information on this or other Liberon products please contact Liberon Technical Services on 01797 367555

Liberon Limited, Mountfield Industrial Estate, New Romney, Kent TN28 8XU.
Tel: 01797 367555 Fax: 01797 367575 www.liberon.co.uk
Liberon Ltd is a V33 Group Company.